
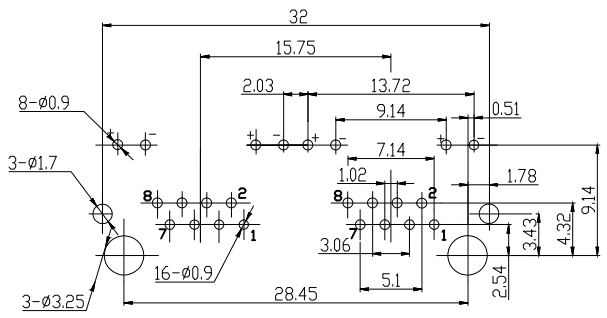
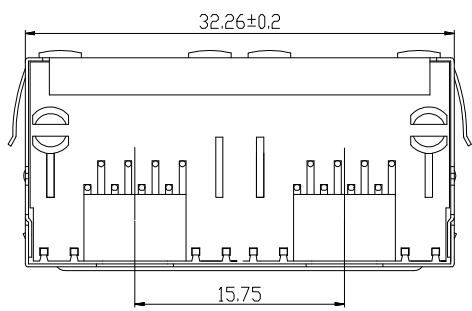
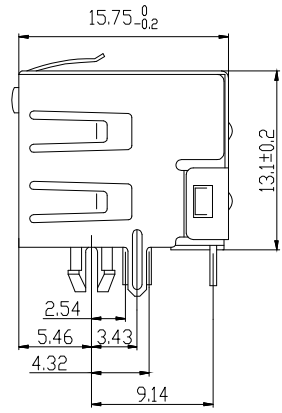


4	3	2	1
CATEGORY	DESCRIPTION	P/N #	
CONNECTOR	Modular Jack, 8P8C, R/A, With LED	MJ5688-BX12-RSLX	

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01		New Release	GMC	2016.08.05

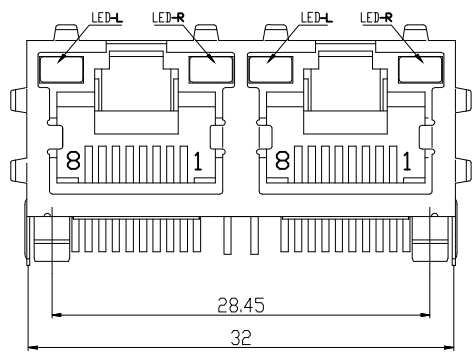

PC Board Layout

SPECIFICATIONS:


1. Voltage: 150V AC RMS
2. Current Rating: 1.5A
3. Contact Resistance: 30mΩ MAX.
4. Insulation Resistance: 500MΩ MIN.
5. Dielectric Withstang Voltage :1000V AC
6. Operature Temperature: -40°C~80°C


MJ5688-BX12-RSLX

X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating
4	Au 30u" Plating
5	Au 50u" Plating

X	LED-L	LED-R
1	Green	Yellow
2	Yellow	Green

e	LED-R	1		See Color Scheme	
d	LED-L	1		See Color Scheme	
c	Shielding	1	Brass	Ni Plating	
b	Terminal	16	Phosphor Bronze	PLATING	
a	Housing	1	PBT UL94V-0	BLACK	
NO.	PART NAME	Q'TY	MATERIAL	Material & Plating	Remark


**東莞市合陵電子有限公司**  
**DongGuan HeLing Electronic Co.,LTD**

SCALE:1/1 UNIT: mm  DWG.NO:  
 SIZE: A3 PAGE:1 OF 1 **REV:A01**  
 APPROVED BY: \_\_\_\_\_ CHECKED BY: \_\_\_\_\_ PREPARED BY: \_\_\_\_\_  
 DICK: \_\_\_\_\_ WZ: \_\_\_\_\_ WZ: \_\_\_\_\_  
**CUSTOMER COPY**